

# Technical data sheet

## (Gypsum)

- Description (a) Next Print gypsum filament is a multi-extrusion 3D printing.  
(b) The filament is full color & opaque.  
(c) Easy print & Easy sanded.
- Key features (a) Filament Easy sanded.
- Applications (a) art 、 exhibits 、 creation 、 sanded product.


### Material specifications


- (1) Standard Product Forms: 3 mm pellet, 1.75 mm and 2.85 mm filament
- (2) Filament color is natural.
- (3) Net filament weight 1kg

### Ultimaker parameter for gypsum

Nozzle	210°C
Z	0.05~0.2mm
Print speed	40mm/s
bottem	Room temp or 60°C
fan	0~100%

### Model

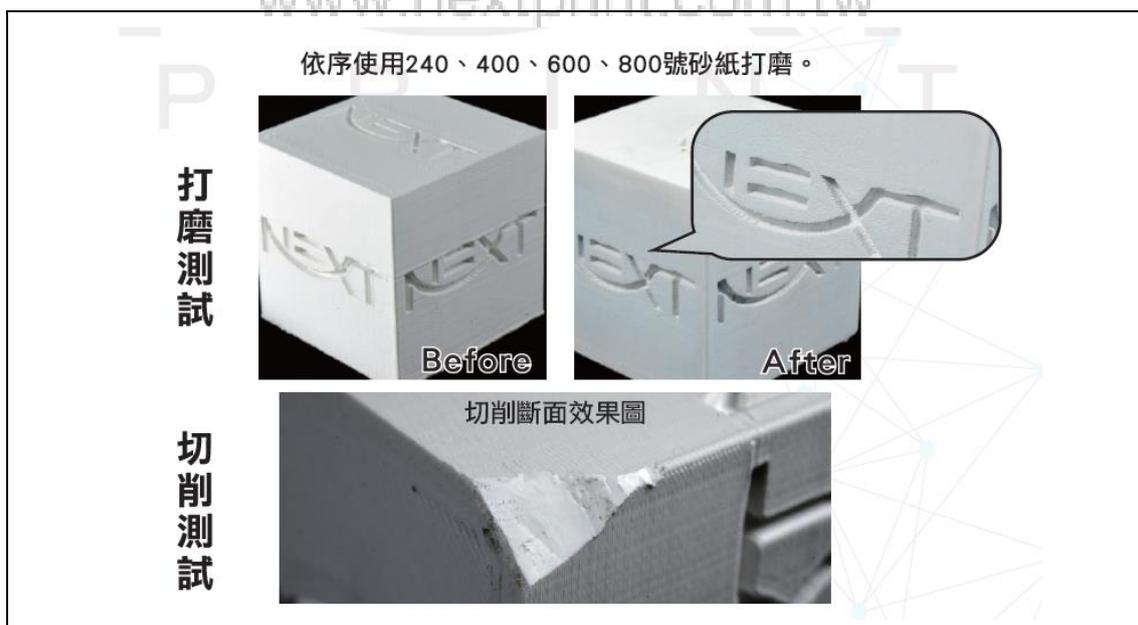

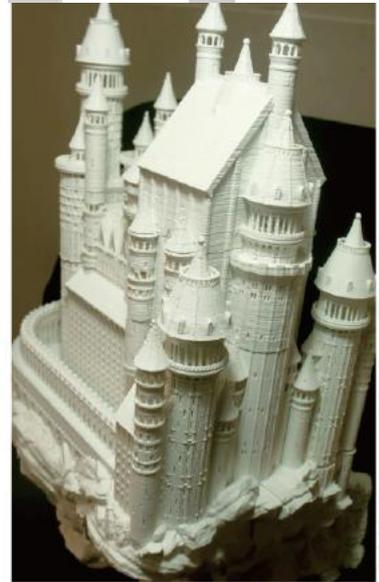

nextprint.tainan@gmail.com

## Disclaimer

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control. Next Print studio. Expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information.

The information provided herein relates only to the specific product described and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement. See SDS for Health & Safety Considerations